

# UltraGlaze™ SSG4800J

## Silicone Structural Glazing Adhesive

### Product Description

UltraGlaze SSG4800J structural glazing adhesive is a one-component, high-strength neutral cure silicone elastomeric adhesive with accelerated cure characteristics providing for enhanced early hour cure properties. SSG4800J is useful in structurally glazed curtain wall applications. The material is supplied as a paste, which cures into a durable flexible silicone rubber upon exposure to atmospheric moisture.

### Key Features and Typical Benefits

- **Silicone Durability** - Exhibits excellent long term resistance to ultraviolet radiation, high and low temperatures, rain, snow and natural weathering with negligible change in elasticity.
- **Stable Consistency (uncured state)** - Supplied as a lightweight paste the consistency of which remains relatively unchanged over a wide temperature range. The material will extrude easily from the cartridge or container and remains workable under almost any practical temperature without requiring heating (other sealant types can stiffen upon exposure to cooler conditions and require heating in order to dispense and work the material).
- **Thermal Stability (cured state)** - Once cured, the material remains flexible over a temperature range of -55°F (-48°C) to 250°F (121°C).
- **Primerless Adhesion** - Bonds to most conventional substrates and finishes including: glass, glass coatings, ceramic frits, fluropolymer and power coated paints, conversion-coated and anodized aluminium. Some finishes may require a primer.
- **Low Sag or Slump** - Which may be used for application to horizontal, vertical or overhead surfaces.
- **Accelerated Cure** - Faster early hour cure properties to facilitate handling of assembled units.
- **High Tensile Strength** - Increases safety factors in SSG designs.
- **High Tear Strength** - Useful in Protective Glazing applications.
- **Compatible** with these insulating glass products: IGS3703, IGS3713-D1, IGS3729, IGS3723, IGS3733.
- **Compatible** with these weatherproofing sealants: SCS2000N, SCS2700, SCS9000, SCS2800, SCS2900.
- **Compatible** with these SSG products: SSG4000AC and SSG4600, SSG4400 series.
- Non-corrosive cure byproduct with low odor.

### Potential Applications

- UltraGlaze SSG4800J structural glazing adhesive may be an excellent material of choice for use in structural glazing applications such as factory glazing of unitized curtainwall systems or in field constructed stick curtainwall systems.
- UltraGlaze SSG4800J structural glazing adhesive can also be used as a weatherseal product, when movement expected in the joint does not exceed its movement capability ( $\pm 25\%$ ).
- UltraGlaze SSG4800J structural glazing adhesive has been validated in designs as an appropriate candidate for consideration for use in protective glazing applications.
- UltraGlaze SSG4800J structural glazing adhesive is useful in panel stiffener applications.

### Packaging

UltraGlaze SSG4800J structural glazing adhesive is available in 20 fl.oz. (591.5ml) foil sausage packs.

### Colors

UltraGlaze SSG4800J is available in Black and Gray.

## Typical Physical Properties

Typical property values of UltraGlaze SSG4800J adhesive as supplied and cured are set forth in the tables below. Assistance with specifications is available by contacting Momentive Performance Materials (MPM) at 800 820 0202.

### Typical Properties - Uncured

Property	Value	Test Method
Color	Black, Grey	-
Polymer	100% Silicone	-
Consistency	Paste	-
Specific Gravity	1.45	-
Work Life (tooling time)	10-20 minutes	-
Tack Free Time	60-90 minutes	ASTM C679
Application Rate	2 seconds	ASTM C603
Sag/Slump	1mm max	ASTM D2202

### Typical Properties - Cured

Property	Value	Test Method
Hardness Durometer (Type A Indentor)	45	ASTM D2240
Ultimate Tensile Strength	2.3 MPa	ASTM D412
Ultimate Elongation	400%	ASTM D412
Tensile at 50% Elongation	0.59 MPa	ASTM C1184
Ultimate Tensile Strength	0.89 MPa	ASTM C1135
Ultimate Elongation	160%	ASTM C1135
Tear Strength; die B	65.7 ppi	ASTM D624
Shear Strength (@ 1/4" thickness)	0.80 MPa	ASTM C961
Peel Strength (average); aluminium, glass (21-day cure @ 75°F (21°C) 50% RH)	50 ppi	ASTM C794
Joint Movement Capability	±25%	ASTM C719
Service Temperature Range (after cure)	-48°C to +149°C	-
Weathering and U.V. Resistance	Excellent	20 yr. study
Cure Time (1/4" or 6 mm deep section) @ 75°F (24°C) 50% RH	3-4 days	-
Full Cure (most common bead sizes)	10-14 days	-

Typical properties are average data and are not to be used as or to develop specifications.

## Installation

### Surface Preparation

Sealants may not adhere or maintain long-term adhesion to substrates if the surface is not prepared and cleaned properly before sealant application. Using proper materials and following prescribed surface preparation and cleaning procedures is vital for sealant adhesion. Momentive Performance Materials can provide quality control information and suggestions to user upon request.

### Materials

- Use clean, fresh solvent as recommended by the sealant manufacturer's test report. When handling solvents, refer to manufacturer's MSDS for information on handling, safety and personal protective equipment. Isopropyl Alcohol (IPA) is commonly used and has proven useful for most substrates encountered in SSG systems. Xylene and Toluene have also been found useful on many substrates.
- Use clean, white cloths free of lint or other lint-free wiping materials.
- Use a clean, narrow-blade putty knife when tooling structural silicone into the cavity.
- Use primer when required.

### Cleaning Procedures

- Remove all loose material (such as dirt and dust), plus any oil, frost or other contaminants from the substrates to which the structural silicone will be adhered.
- Do not use detergent to clean the substrate as residue may be left on the surface.
- Clean the substrates receiving the sealant as follows: Using a two-rag wipe technique. Wet one rag with solvent and wipe the surface with it, then use the second rag to wipe the wet solvent from the surface BEFORE it evaporates. Allowing solvent to dry on the surface without wiping with a second cloth can negate the entire cleaning procedure because the contaminants may be re-deposited as the solvent dries.
- Change the cleaning rags frequently, as they become soiled. It is easier to see the soiling if white rags are used. Do not dip used wipe cloths into solvent as this can contaminate the solvent. Cleaning with contaminated solvent can result in sealant adhesion issues. Always use clean containers for solvent use and for solvent storage.
- When cleaning deep, narrow joints, wrap the cleaning cloth around a clean, narrow-blade putty knife. This permits force to be applied to the cleaned surface.
- Clean only as much area as can be sealed in one hour. If cleaned areas are again exposed to rain or contaminants, the surface must be cleaned again.

## Installation - Continued

### Primers

UltraGlaze SSG4800J structural glazing adhesive will bond to many clean surfaces without the aid of a primer. For difficult-to-bond substrates, the use of a primer or special surface preparation should be evaluated. An evaluation should be made for each specific application/substrate to determine quality of bond. When properly used, primers help assure strong and consistent sealant adhesion to surfaces that may be difficult to bond. Most primers are a blend of organic and inorganic chemicals, resins and solvents. NEVER APPLY PRIMER TO GLASS SURFACES. Obtaining the proper materials, as well as following the prescribed procedures, is vital to ensure the successful use of primers. PRIMER APPLICATION IS NOT A SUBSTITUTE FOR SURFACE PREPARATION. Consult MPM sealants primer datasheet(s) for specifics and recommendations for use.

### CAUTION

Primers may contain solvents. When handling solvents, refer to manufacturer's MSDS for information on handling, safety and personal protective equipment.

### Masking

- To simplify clean up of excess sealant, use easy to release, pressure sensitive tape to mask adjacent surfaces before applying the structural silicone sealant.
- Start from the top down and overlap the runs. Tool in direction of over-lap so that masking is not disturbed during tooling.
- Remove masking immediately after application of silicone or as soon as practical.
- Drop cloths can be used to cover any surfaces likely to collect excess sealant removed during tooling operations.

## Joint Designs and Dimensions

Silicone contact width and thickness (see Figure 1) will vary by project with the design wind load and glass size. Contact width can be calculated using the following formula: [Design Wind Load (PSF) x Longest Short Span of Glass or Panel (Ft.)] divided by 480. A minimum sealant thickness of 1/4" (7mm) between substrates is required to accommodate thermal expansion and contraction (see Figure 2) of most systems and should be used in order to assure that sealant can be injected into the structural cavity obtaining full contact with both the glass and metal surfaces while remaining free of air voids. Greater joint thickness may be required to accommodate movement in some larger-sized SSG systems. MPM can be contacted to assist in determination of proper joint thickness to accommodate expected movement in structurally glazed applications.


The following materials are required to be submitted to **Momentive Performance Materials** to receive suggestions for the use of UltraGlaze SSG4800J structural glazing adhesive.

- Architectural and shop drawings for review and comment.
- Design wind load requirement(s) for project.
- Glass or panel sizes.
- Production samples of metal, glass, gaskets, spacers and setting blocks with type and manufacturer identified.
- Specification and/or identification of paint or finish to which UltraGlaze SSG4800J structural glazing adhesive is intended to adhere (i.e., 215-R1 anodized or if paint; manufacturer, finish system and ID#).

**Momentive Performance Materials will provide the following, after reviewing the materials above:**


- Determination as to whether the submitted joint dimensions meet the minimum design criteria necessary for the use of UltraGlaze SSG4800J structural glazing adhesive.
- Short-term adhesion data using (typically) ASTM C794 and/or ASTM C1135 test method. Other test methods may be employed.
- Short-term compatibility test results on gaskets, spacers and setting blocks and other accessories per ASTM C1087 or MPM sealants test method for compatibility.
- Information regarding suggested primers, when required.

Figure 1

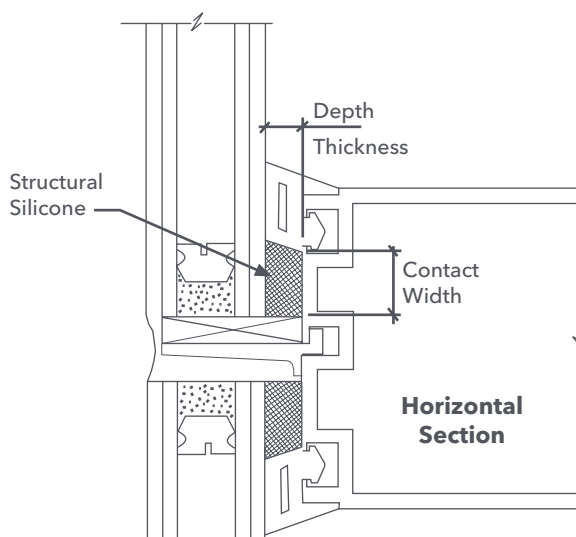

## Joint Designs and Dimensions - Continued

Figure 2: Movement from thermal expansion and contraction and/or glass rotation.

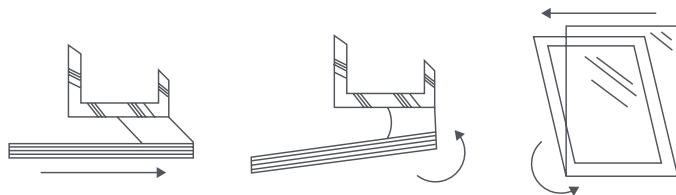

### Momentive Performance Materials will not:

- Design sealant joints.
- Provide comments on the structural integrity of overall framing system(s).
- Provide long-term performance data.

The design professional has final responsibility for the determination of structural sealant joint dimensions based on project conditions, design wind load(s), glass or panel sizes, anticipated thermal, seismic or other movement of the system.

*The ASTM C1401 Standard Guide for Structural Sealant Glazing provides a thorough overview of design topics and information for use in SSG systems.*

## Structural Glazing

### Sealant Application

- Apply the sealant by pushing the bead ahead of the nozzle and making sure that the entire cavity is filled. Tooling should be done neatly, forcing the sealant into contact with the sides of the joint, thus helping to eliminate any internal voids and assuring good substrate contact. AIR POCKETS OR VOIDS WITHIN THE STRUCTURAL CAVITY ARE NOT ACCEPTABLE.
- Due to the smooth consistency of UltraGlaze SSG4800J structural glazing adhesive, tooling agents such as water, soap or detergent solutions are not necessary or recommended. Dry tooling is recommended.
- Sealant application is not recommended when the temperature is below 40°F (4°C) or if frost or moisture is present on the surfaces to be sealed.
- UltraGlaze SSG4800J structural glazing adhesive works best when applied to surfaces below 122°F (50°C).
- UltraGlaze SSG4800J structural glazing adhesive should not be applied in totally confined spaces since the sealant requires atmospheric moisture from the air and release of cure by-products to cure properly and develop typical properties. In a typical SSG cavity, cure depths up to 3/4" from an air interface will generally cure satisfactorily and

reach maximum properties within several days. Cure depths > 3/4" may take significantly longer time to cure and when applied in a single application may not cure satisfactorily. Please consult Momentive Performance Materials technical services for additional information on depth of cure for this product.

- The cure rate of this product is dependent upon temperature and the availability of atmospheric moisture. Under Standard Conditions (relative humidity of 50 ±5% at an air temperature of 73.4 ±2°F [23 of ±1°C]) this material can attain a cured thickness of 3-4 mm per 24 hours (assuming ample access to atmospheric moisture). As temperature decreases, the cure rate slows down (and vice versa). Low moisture environments will also reduce the cure rate. Near-confined spaces which limit the overall access to atmospheric moisture will cure only from that surface which has access to the atmosphere. Colder temperatures can significantly increase cure times and can open the possibility of sealant irregularities if joint movement occurs while sealant is not fully cured. The following reference provides additional information on Movement-During-Cure of sealant joints: ASTM C1193 – Standard Guide for Use of Joint Sealants; section 12.5.

### Method of Application

UltraGlaze SSG4800J structural glazing adhesive can be dispensed directly from cartridges and foil sausage packs. Consult Momentive Performance Materials regarding suggested pumping equipment and information.

### Storage Conditions and Warranty Period

The warranty period is 12 months from date of shipment from Momentive Performance Materials<sup>1</sup> if stored in the original unopened container at 80°F (27°C) or lower. All users of this material are recommended to obtain and retain any invoices or other documentation relating to delivery and to manage their inventory on a FIFO (FIRST IN / FIRST OUT) basis.

### Availability

Information on ordering can be obtained from Momentive Performance Materials or an authorized MPM sealants' product distributor. For information regarding cost, contact your local distributor or account manager.

### Government Requirement

Prior to considering use of an MPM sealant product in fulfilling any government requirement, please contact the Government and Trade Compliance office.

## Applicable Standards

UltraGlaze SSG4800J structural glazing adhesive meets or exceeds the requirements of the following specifications for one-part sealants.

### ASTM Specifications:

- C1184, Type S, Use G and O
- C920; Type S, Grade NS, Class 25, Use NT, A, G, O

### China Specification:

- GB16776

## Technical Services

For additional technical resources, please contact your local customer service center. (See Customer Service Centers section herein for contact information.) Any technical advice furnished by MPM or any representative of MPM concerning any use or application of any MPM product is believed to be reliable, but MPM makes no warranty, expressed or implied, of suitability for use in any application for which such advice is furnished.

## Limitations

Customers must evaluate MPM products and make their own determination as to the fitness of use in their particular applications.

## Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

## Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at [www.siliconesforbuilding.com](http://www.siliconesforbuilding.com) or, upon request, from any MPM representative. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

## Customer Service Centers

<b>Americas</b>	+1 800 295 2392 Toll free Email: commercial.services@momentive.com
<b>Latin Americas</b>	<b>Brazil</b> +55 11 4534 9650 Direct Number Email: contato@momentive.com  <b>Mexico</b> +52 55 2169 7670 Direct Number Email: commercial.services@momentive.com
<b>EMEIA - Europe, Middle East, Africa, and India</b>	<b>Europe</b> +39 05 1092 4300 Direct Number  <b>Middle East, Africa and India</b> + 91 44 7121 2207 Direct Number* *All Middle Eastern countries, Africa, India, Pakistan, Bangladesh, Sri Lanka Email: 4information.eu@momentive.com
<b>APAC - Asia Pacific</b>	<b>China</b> 800 820 0202 Toll free +86 21 3860 4892 Direct Number  <b>Japan</b> Sales: JP.Silicones@momentive.com  <b>Korea</b> +82 2 6201 4600 Direct Number  <b>South East Asia, Australia &amp; New Zealand</b> +60 3 9206 1543 Direct Number* *South East Asia countries (Malaysia, Singapore, Thailand, Indonesia, Vietnam, Philippines, Cambodia, Myanmar / other countries located in Pacific region).
<b>MyMomentive™ Order Management Site</b>	shop.mymomentive.com

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBE HEREIN. Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

Before purchasing or using any Momentive products, please visit [www.siliconeforbuilding.com/legaldisclaimer](http://www.siliconeforbuilding.com/legaldisclaimer) to view our full product and sales disclaimer.

The use of the "TM" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc., or its affiliated companies.

Copyright 2024 Momentive Performance Materials Inc. All rights reserved.

**siliconesforbuilding.com**



**Licensed  
Partner**