

KM Neoprene Rubber Sheet

Solid Rubber Synthetic Material


Material Description

KM Neoprene Rubber Sheet is used for many applications and is well suited for application requiring a stable, resilient rubber for mostly indoor and sheltered environments.

Key Performance Properties

- Oil Resistance
- Water Resistance
- Good Wear & Tear Resistance
- Good UV Stability

~ Please consult our technical services for any enquiries and application concerns.

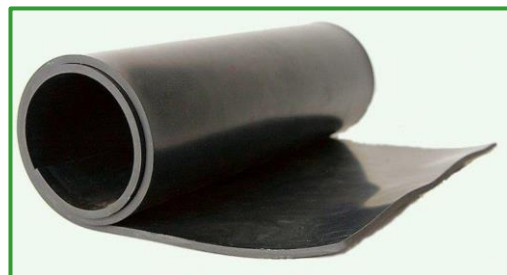

Technical Performance

Material Properties	
Material Type	Neoprene
Color	Black
Thickness	1mm to 25mm
Dimension	Up to 48-inch width

Performance Properties		
Density		1.5 ± 0.05
Hardness	Shore A	60 ± 5
Tensile Strength	MPa	≥ 5.0
Elongation at Break	%	≥ 400
Performance Temperature	°C	-20 to 100
Abrasion Resistance	mm ³	480
Tear Resistance		8

This information corresponds to our current knowledge on the subject. It is not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of our products for any application other than the application as specified herein. This information may be subject to revision as new knowledge and experience becomes available. Since we cannot anticipate all variations in actual end-use conditions, makes no warranties and assumes no liabilities in connection with any use of this information for applications other than the application as specified herein. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent right. Product safety information is available on request. This data sheet is a printed document and is valid without signature.